


PT

PC

FS-PT/PC系列/SIZE 3XD

國標銑刀柄通用型鎢鋼鑽頭

Milling tungsten steel drill bit shank

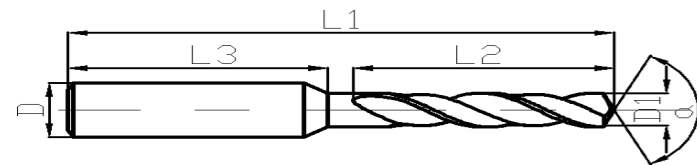

国标通用标准

规格区间: D0.5-D4.0
规格间距: 0.05 mm



訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-050	0.50	4.0	50.0	4.0
FS-PT/PC-060	0.60	5.0	50.0	4.0
FS-PT/PC-070	0.70	5.0	50.0	4.0
FS-PT/PC-080	0.80	5.0	50.0	4.0
FS-PT/PC-090	0.90	5.0	50.0	4.0
FS-PT/PC-100	1.00	6.0	50.0	4.0
FS-PT/PC-110	1.10	6.0	50.0	4.0
FS-PT/PC-120	1.20	6.0	50.0	4.0
FS-PT/PC-130	1.30	6.0	50.0	4.0
FS-PT/PC-140	1.40	8.0	50.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-055	0.55	4.0	50.0	4.0
FS-PT/PC-065	0.65	5.0	50.0	4.0
FS-PT/PC-075	0.75	5.0	50.0	4.0
FS-PT/PC-085	0.85	5.0	50.0	4.0
FS-PT/PC-095	0.95	5.0	50.0	4.0
FS-PT/PC-105	1.05	6.0	50.0	4.0
FS-PT/PC-115	1.15	6.0	50.0	4.0
FS-PT/PC-125	1.25	6.0	50.0	4.0
FS-PT/PC-135	1.35	8.0	50.0	4.0
FS-PT/PC-145	1.45	8.0	50.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-150	1.50	8.0	50.0	4.0
FS-PT/PC-160	1.60	8.0	50.0	4.0
FS-PT/PC-170	1.70	8.0	50.0	4.0
FS-PT/PC-180	1.80	9.0	50.0	4.0
FS-PT/PC-190	1.90	9.0	50.0	4.0
FS-PT/PC-200	2.00	10.0	50.0	4.0
FS-PT/PC-210	2.10	10.0	50.0	4.0
FS-PT/PC-220	2.20	10.0	50.0	4.0
FS-PT/PC-230	2.30	12.0	50.0	4.0
FS-PT/PC-240	2.40	12.0	50.0	4.0
FS-PT/PC-250	2.50	12.0	50.0	4.0
FS-PT/PC-260	2.60	12.0	50.0	4.0
FS-PT/PC-270	2.70	14.0	50.0	4.0
FS-PT/PC-280	2.80	14.0	50.0	4.0
FS-PT/PC-290	2.90	14.0	50.0	4.0
FS-PT/PC-300	3.00	14.0	50.0	4.0
FS-PT/PC-310	3.10	16.0	50.0	4.0
FS-PT/PC-320	3.20	16.0	50.0	4.0
FS-PT/PC-330	3.30	16.0	50.0	4.0
FS-PT/PC-340	3.40	16.0	50.0	4.0
FS-PT/PC-350	3.50	16.0	50.0	4.0
FS-PT/PC-360	3.60	18.0	50.0	4.0
FS-PT/PC-370	3.70	18.0	50.0	4.0
FS-PT/PC-380	3.80	18.0	50.0	4.0
FS-PT/PC-390	3.90	18.0	50.0	4.0
FS-PT/PC-400	4.00	18.0	50.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-155	1.55	8.0	50.0	4.0
FS-PT/PC-165	1.65	8.0	50.0	4.0
FS-PT/PC-175	1.75	8.0	50.0	4.0
FS-PT/PC-185	1.85	9.0	50.0	4.0
FS-PT/PC-195	1.95	9.0	50.0	4.0
FS-PT/PC-205	2.05	10.0	50.0	4.0
FS-PT/PC-215	2.15	10.0	50.0	4.0
FS-PT/PC-225	2.25	10.0	50.0	4.0
FS-PT/PC-235	2.35	12.0	50.0	4.0
FS-PT/PC-245	2.45	12.0	50.0	4.0
FS-PT/PC-255	2.55	12.0	50.0	4.0
FS-PT/PC-265	2.65	14.0	50.0	4.0
FS-PT/PC-275	2.75	14.0	50.0	4.0
FS-PT/PC-285	2.85	14.0	50.0	4.0
FS-PT/PC-295	2.95	14.0	50.0	4.0
FS-PT/PC-305	3.05	16.0	50.0	4.0
FS-PT/PC-315	3.15	16.0	50.0	4.0
FS-PT/PC-325	3.25	16.0	50.0	4.0
FS-PT/PC-335	3.35	16.0	50.0	4.0
FS-PT/PC-345	3.45	16.0	50.0	4.0
FS-PT/PC-355	3.55	16.0	50.0	4.0
FS-PT/PC-365	3.65	18.0	50.0	4.0
FS-PT/PC-375	3.75	18.0	50.0	4.0
FS-PT/PC-385	3.85	18.0	50.0	4.0
FS-PT/PC-395	3.95	18.0	50.0	4.0



◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors


◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors



FS-PT/PC系列/SIZE 3XD 國標銑刀柄通用型鎢鋼鑽頭

Milling tungsten steel drill bit shank

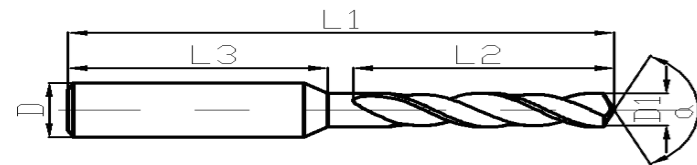

国标通用标准
规格区间: D4.05-D8.0
规格间距: 0.05 mm

- TISIALN
- 0.4 μm
- 30°
- 2Flutes
- HRC < 55
- SHANK h6

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-405	4.05	18.0	50.0	5.0
FS-PT/PC-415	4.15	18.0	50.0	5.0
FS-PT/PC-425	4.25	18.0	50.0	5.0
FS-PT/PC-435	4.35	18.0	50.0	5.0
FS-PT/PC-445	4.45	18.0	50.0	5.0
FS-PT/PC-455	4.55	20.0	50.0	5.0
FS-PT/PC-465	4.65	20.0	50.0	5.0
FS-PT/PC-475	4.75	20.0	50.0	5.0
FS-PT/PC-485	4.85	20.0	50.0	5.0
FS-PT/PC-495	4.95	20.0	50.0	5.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-410	4.10	18.0	50.0	5.0
FS-PT/PC-420	4.20	18.0	50.0	5.0
FS-PT/PC-430	4.30	18.0	50.0	5.0
FS-PT/PC-440	4.40	18.0	50.0	5.0
FS-PT/PC-450	4.50	18.0	50.0	5.0
FS-PT/PC-460	4.60	20.0	50.0	5.0
FS-PT/PC-470	4.70	20.0	50.0	5.0
FS-PT/PC-480	4.80	20.0	50.0	5.0
FS-PT/PC-490	4.90	20.0	50.0	5.0
FS-PT/PC-500	5.00	20.0	50.0	5.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-505	5.05	25.0	50.0	6.0
FS-PT/PC-515	5.15	25.0	50.0	6.0
FS-PT/PC-525	5.25	25.0	50.0	6.0
FS-PT/PC-535	5.35	25.0	50.0	6.0
FS-PT/PC-545	5.45	25.0	50.0	6.0
FS-PT/PC-555	5.55	25.0	50.0	6.0
FS-PT/PC-565	5.65	25.0	50.0	6.0
FS-PT/PC-575	5.75	25.0	50.0	6.0
FS-PT/PC-585	5.85	25.0	50.0	6.0
FS-PT/PC-595	5.95	25.0	50.0	6.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-605	6.05	30.0	60.0	8.0
FS-PT/PC-615	6.15	30.0	60.0	8.0
FS-PT/PC-625	6.25	30.0	60.0	8.0
FS-PT/PC-635	6.35	30.0	60.0	8.0
FS-PT/PC-645	6.45	30.0	60.0	8.0
FS-PT/PC-655	6.55	30.0	60.0	8.0
FS-PT/PC-665	6.65	30.0	60.0	8.0
FS-PT/PC-675	6.75	30.0	60.0	8.0
FS-PT/PC-685	6.85	30.0	60.0	8.0
FS-PT/PC-695	6.95	30.0	60.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-705	7.05	32.0	60.0	8.0
FS-PT/PC-715	7.15	32.0	60.0	8.0
FS-PT/PC-725	7.25	32.0	60.0	8.0
FS-PT/PC-735	7.35	32.0	60.0	8.0
FS-PT/PC-745	7.45	32.0	60.0	8.0
FS-PT/PC-755	7.55	32.0	60.0	8.0
FS-PT/PC-765	7.65	32.0	60.0	8.0
FS-PT/PC-775	7.75	32.0	60.0	8.0
FS-PT/PC-785	7.85	32.0	60.0	8.0
FS-PT/PC-795	7.95	32.0	60.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-510	5.10	25.0	50.0	6.0
FS-PT/PC-520	5.20	25.0	50.0	6.0
FS-PT/PC-530	5.30	25.0	50.0	6.0
FS-PT/PC-540	5.40	25.0	50.0	6.0
FS-PT/PC-550	5.50	25.0	50.0	6.0
FS-PT/PC-560	5.60	25.0	50.0	6.0
FS-PT/PC-570	5.70	25.0	50.0	6.0
FS-PT/PC-580	5.80	25.0	50.0	6.0
FS-PT/PC-590	5.90	25.0	50.0	6.0
FS-PT/PC-600	6.00	25.0	50.0	6.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-610	6.10	30.0	60.0	8.0
FS-PT/PC-620	6.20	30.0	60.0	8.0
FS-PT/PC-630	6.30	30.0	60.0	8.0
FS-PT/PC-640	6.40	30.0	60.0	8.0
FS-PT/PC-650	6.50	30.0	60.0	8.0
FS-PT/PC-660	6.60	30.0	60.0	8.0
FS-PT/PC-670	6.70	30.0	60.0	8.0
FS-PT/PC-680	6.80	30.0	60.0	8.0
FS-PT/PC-690	6.90	30.0	60.0	8.0
FS-PT/PC-700	7.00	30.0	60.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-710	7.10	32.0	60.0	8.0
FS-PT/PC-720	7.20	32.0	60.0	8.0
FS-PT/PC-730	7.30	32.0	60.0	8.0
FS-PT/PC-740	7.40	32.0	60.0	8.0
FS-PT/PC-750	7.50	32.0	60.0	8.0
FS-PT/PC-760	7.60	32.0	60.0	8.0
FS-PT/PC-770	7.70	32.0	60.0	8.0
FS-PT/PC-780	7.80	32.0	60.0	8.0
FS-PT/PC-790	7.90	32.0	60.0	8.0
FS-PT/PC-800	8.00	32.0	60.0	8.0

◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors


◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors



FS-PT/PC系列/SIZE 3XD 國標銑刀柄通用型鎢鋼鑽頭

Milling tungsten steel drill bit shank

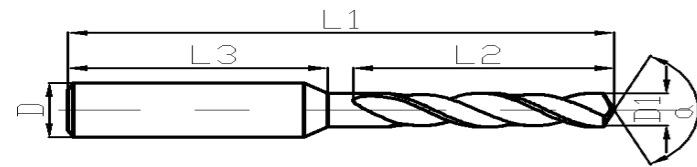

国标通用标准
规格区间: D8.05-D12.0
规格间距: 0.05 mm



訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-805	8.05	40.0	75.0	10.0
FS-PT/PC-815	8.15	40.0	75.0	10.0
FS-PT/PC-825	8.25	40.0	75.0	10.0
FS-PT/PC-835	8.35	40.0	75.0	10.0
FS-PT/PC-845	8.45	40.0	75.0	10.0
FS-PT/PC-855	8.55	40.0	75.0	10.0
FS-PT/PC-865	8.65	40.0	75.0	10.0
FS-PT/PC-875	8.75	40.0	75.0	10.0
FS-PT/PC-885	8.85	40.0	75.0	10.0
FS-PT/PC-895	8.95	40.0	75.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-810	8.10	40.0	75.0	10.0
FS-PT/PC-820	8.20	40.0	75.0	10.0
FS-PT/PC-830	8.30	40.0	75.0	10.0
FS-PT/PC-840	8.40	40.0	75.0	10.0
FS-PT/PC-850	8.50	40.0	75.0	10.0
FS-PT/PC-860	8.60	40.0	75.0	10.0
FS-PT/PC-870	8.70	40.0	75.0	10.0
FS-PT/PC-880	8.80	40.0	75.0	10.0
FS-PT/PC-890	8.90	40.0	75.0	10.0
FS-PT/PC-900	9.00	40.0	75.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-905	9.05	40.0	75.0	10.0
FS-PT/PC-915	9.15	40.0	75.0	10.0
FS-PT/PC-925	9.25	40.0	75.0	10.0
FS-PT/PC-935	9.35	40.0	75.0	10.0
FS-PT/PC-945	9.45	40.0	75.0	10.0
FS-PT/PC-955	9.55	40.0	75.0	10.0
FS-PT/PC-965	9.65	40.0	75.0	10.0
FS-PT/PC-975	9.75	40.0	75.0	10.0
FS-PT/PC-985	9.85	40.0	75.0	10.0
FS-PT/PC-995	9.95	40.0	75.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-910	9.10	40.0	75.0	10.0
FS-PT/PC-920	9.20	40.0	75.0	10.0
FS-PT/PC-930	9.30	40.0	75.0	10.0
FS-PT/PC-940	9.40	40.0	75.0	10.0
FS-PT/PC-950	9.50	40.0	75.0	10.0
FS-PT/PC-960	9.60	40.0	75.0	10.0
FS-PT/PC-970	9.70	40.0	75.0	10.0
FS-PT/PC-980	9.80	40.0	75.0	10.0
FS-PT/PC-990	9.90	40.0	75.0	10.0
FS-PT/PC-1000	10.00	40.0	75.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-1005	10.05	42.0	75.0	12.0
FS-PT/PC-1015	10.15	42.0	75.0	12.0
FS-PT/PC-1025	10.25	42.0	75.0	12.0
FS-PT/PC-1035	10.35	42.0	75.0	12.0
FS-PT/PC-1045	10.45	42.0	75.0	12.0
FS-PT/PC-1055	10.55	42.0	75.0	12.0
FS-PT/PC-1065	10.65	42.0	75.0	12.0
FS-PT/PC-1075	10.75	42.0	75.0	12.0
FS-PT/PC-1085	10.85	42.0	75.0	12.0
FS-PT/PC-1095	10.95	42.0	75.0	12.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-1010	10.10	42.0	75.0	12.0
FS-PT/PC-1020	10.20	42.0	75.0	12.0
FS-PT/PC-1030	10.30	42.0	75.0	12.0
FS-PT/PC-1040	10.40	42.0	75.0	12.0
FS-PT/PC-1050	10.50	42.0	75.0	12.0
FS-PT/PC-1060	10.60	42.0	75.0	12.0
FS-PT/PC-1070	10.70	42.0	75.0	12.0
FS-PT/PC-1080	10.80	42.0	75.0	12.0
FS-PT/PC-1090	10.90	42.0	75.0	12.0
FS-PT/PC-1100	11.00	42.0	75.0	12.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-1105	11.05	48.0	80.0	12.0
FS-PT/PC-1115	11.15	48.0	80.0	12.0
FS-PT/PC-1125	11.25	48.0	80.0	12.0
FS-PT/PC-1135	11.35	48.0	80.0	12.0
FS-PT/PC-1145	11.45	48.0	80.0	12.0
FS-PT/PC-1155	11.55	48.0	80.0	12.0
FS-PT/PC-1165	11.65	48.0	80.0	12.0
FS-PT/PC-1175	11.75	48.0	80.0	12.0
FS-PT/PC-1185	11.85	48.0	80.0	12.0
FS-PT/PC-1195	11.95	48.0	80.0	12.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FS-PT/PC-1110	11.10	48.0	80.0	12.0
FS-PT/PC-1120	11.20	48.0	80.0	12.0
FS-PT/PC-1130	11.30	48.0	80.0	12.0
FS-PT/PC-1140	11.40	48.0	80.0	12.0
FS-PT/PC-1150	11.50	48.0	80.0	12.0
FS-PT/PC-1160	11.60	48.0	80.0	12.0
FS-PT/PC-1170	11.70	48.0	80.0	12.0
FS-PT/PC-1180	11.80	48.0	80.0	12.0
FS-PT/PC-1190	11.90	48.0	80.0	12.0
FS-PT/PC-1200	12.00	48.0	80.0	12.0

◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors

◎ PT-適用切削材質: 鋁、有色金屬、非金屬類材料。(未塗層刀具)
◎ PC-適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ PC-塗層刀具: 依照被加工材質不同塗層及顏色

◎ PT-Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ PC-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ PC-Coated tools: the material to be processed in accordance with different coatings and colors